


// JIB ARMS



// GF-BABY JIB

The GF-Baby Jib is a stable, very compact jib with an arm length of only 45 cm / 1' 6" (pivot point to Euro-adapter). It is ideal for working off dollies in tight confined spaces as it provides additional pan and tilt adjustment plus smooth, vibration free movements. It weighs less than 16 kg / 35 lbs.

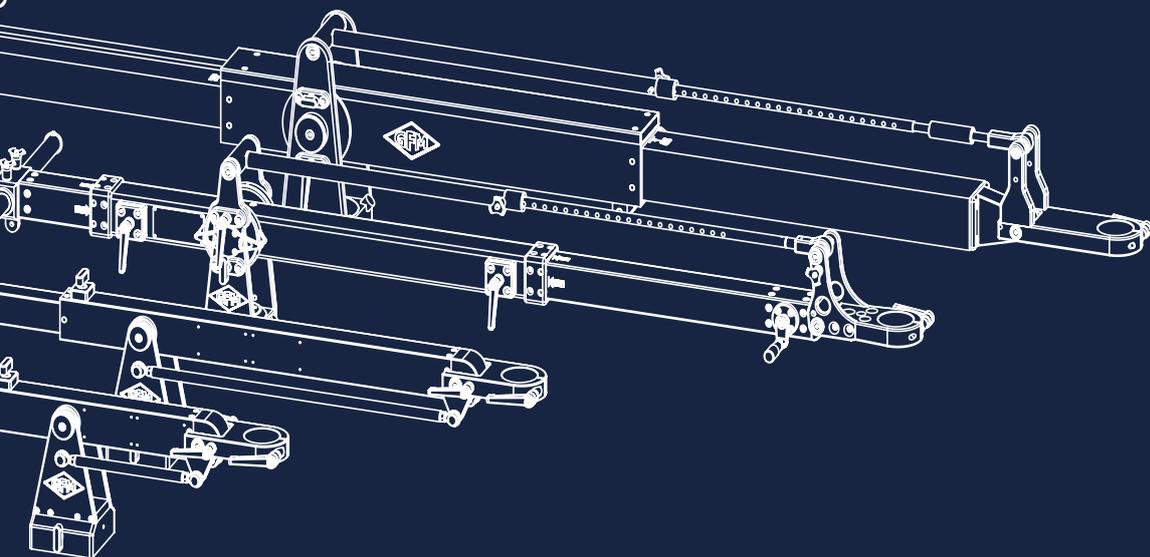

- GF-7600 GF-Baby Jib consisting of:**
- Fixed length front arm
 - Crankable counterweight end
 - Tilt friction and brakes
 - Fitting for double Euro-adapter or extension tubes
 - Double Euro-adapter
 - 2 counterweight rods

TECHNICAL SPECIFICATIONS	
Reach	45 cm / 1' 5"
Rear - retracted	31cm / 1'
Rear - extended	63 cm / 2'
Max. Payload	30 kg / 66 lbs
Jib mount required	Euro-adapter (Mitchell available)
Camera head mount	Euro-adapter to Bowl or Mitchell
Weight of Jib	15.8 kg / 34.8 lbs
Max. counterweight	48 kg / 105 lbs [4 x 12 kg]
Tilt angle	53°

For this product there is a custom designed flight case available!

K-1528



The counterweight end of the GF-Baby Jib Arm adjusts from 31cm/1' to 63cm/2' enabling perfect balance at any angle. The tilt »drag« can be adjusted to suit the individual operators' preferences.



Different camera mounting positions

// GF-MINI JIB

The GF-Mini Jib is a lightweight, stable, compact jib for camera packages weighing up to 30 kg / 66 lbs. It provides smooth, vibration free movements in tight, confined spaces whether working off a dolly or tripod. The complete GF-Mini Jib set fits into one flight case.



GF-7700 GF-Mini Jib consisting of:

- Fixed length front arm
- Crankable counterweight end
- Tilt friction and brakes
- Fitting for double Euro-adapter or extension tubes
- Double Euro-adapter
- 2 counterweight rods

TECHNICAL SPECIFICATIONS

Reach	82 cm / 2' 10"
Rear - retracted	31 cm / 1'
Rear - extended	100 cm / 3' 3"
Max. payload	30 kg / 66 lbs
Jib mount required	Euro-adapter (Mitchell available)
Camera head mount	Euro-adapter to Bowl or Mitchell
Weight of Jib	17 kg / 37 lbs
Max. counterweight	48 kg / 105 lbs [4 x 12 kg]
Tilt angle	53°

For this product there is a custom designed flight case available!



K-1509



Its counterweight arm can be steplessly adjusted by a crank and extended up to a max. of 100 cm. A user-friendly brake attached to the end of the GF-Mini Jib also serves as friction, depending on the tight-ening torque. Most Jib Arm components are made of aluminium and have a very hard and durable surface protection (Hart-Coat®).



Different camera mounting positions

// GF-TELE JIB

The GF-Tele Jib is a lightweight, stable and variable length Jib Arm. The advantage is a very fast resetting of the arm length by telescoping in or out and then fixing the arm at the required working length. It carries camera packages of up to 45 kg and offers smooth, vibration free movements, added flexibility when working on tight sets. It comes loaded onto one trolley with weights and accessories.



GF-7500 GF-Tele Jib consisting of:

- Adjustable front arm (crankable)
- Crankable counterweight end
- Tilt friction and brakes
- Fitting for double Euro-adapter
- Double Euro-adapter
- 2 counterweight rods



GF-7510 Transport trolley for GF-Tele Jib, 8 counterweights and accessories

TECHNICAL SPECIFICATIONS

Reach - retracted	103 cm / 3' 5"
Reach - extended	156 cm / 5' 1"
Rear - retracted	37 cm / 1' 3"
Rear - extended	54 cm / 1' 9"
Max. payload - retracted	45 kg / 99 lbs
Max. payload - extended	30 kg / 66 lbs
Jib mount	Euro-adapter (Mitchell available)
Camera head mount	Euro-adapter to Bowl or Mitchell
Weight of Jib	25 kg / 55 lbs
Max. counterweight	96 kg / 211 lbs (8 x 12 kg)
Tilt angle	56°



Different camera mounting positions

// GF-JIB

The GF-Jib Arm was designed to function as a stable, solid jib specifically for heavier camera packages up to 60 kg. It comes packed onto one trolley with weights and accessories. Its manual length adjustment allows it to be quickly set at the required length.



GF-7800 GF-Jib consisting of:

- Adjustable front arm
- Crankable counterweight end
- Tilt friction and brakes
- Fitting for double Euro-adapter
- Double Euro-adapter
- 1 counterweight rod



The GF-Jib's counterweight arm is telescopic and can be easily adjusted to the required length with just a few turns of the crank to ensure perfect balance at any angle.



Cameras can be mounted in different positions and the Combi-rig extension tubes provide additional setup possibilities.



GF-7810 Transport trolley for GF-Jib, 10 counterweights and accessories

TECHNICAL SPECIFICATIONS

Reach - retracted	139 cm / 4' 6"	Weight of Jib	42 kg / 92 lbs
Reach - extended	188 cm / 6' 1"	Max. counterweight	120 kg / 264 lbs (10 x 12 kg)
Rear - retracted	42 cm / 1' 4"	Tilt angle	43°
Rear - extended	94 cm / 3' 1"		
Lift range - retracted	186 cm / 6' 1"		
Lift range - extended	256 cm / 8' 4"		
Max. payload - retracted	60 kg / 132 lbs		
Max. payload - extended	40 kg / 88 lbs		
Jib mount	Euro-adapter (Mitchell available)		
Camera head mount	Euro-adapter to Bowl or Mitchell		

// GF-MULTI JIB



The GF-Multi Jib is a professional, lightweight and modular Jib arm, suitable for carrying all general remote head systems. It is portable, mobile and mounts on most standard dollies fitted with Euro-adapter or Mitchell mounts.

The arm is stabilized with an easy to mount, rod rigging system. In general, the 2 x 150 cm sections are used as front arm extensions whereas the 100, 50 and 30 cm sections function as both rear and front sections. A multitude of configurations are possible simply by combining the sections and building the arm to the length required.



FEATURES

- Dedicated tripod
- Fits on most dollies
- Mitchell or Euro-adapter mounts
- Extremely fast and easy set-up and lightweight parts
- Interchangeable extensions
- Stable rigid arm
- Aluminium components
- Surface hardened finish [Hart-Coat®]
- Reach: 1m to 5 m / 3' to 15'
- Max. payload: 60 kg / 132 lbs


GF-9150 GF-Multi Jib consisting of:

- Angle adjuster for counterweight rod or bucket
- Pan bearing with brake (fits tripod or column)
- Pivot section with tilt friction
- Remote bracket with Mitchel 3 way Leveller
- 1 Extension arm (100 cm / 3' 4") with parallelogram
- 1 Extension arm (50 cm / 1' 6") with parallelogram
- 1 Extension arm (30 cm / 1') with parallelogram
- 2 Extension arms (150 cm / 5') with parallelogram
- 1 Rigging system
- 1 Sliding weight

GF-9317 Counterweight rod adapter incl. weight rod

GF-9125 Counterweight bucket

SET-UP EXAMPLES

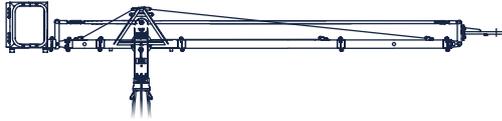

Reach (measured from pivot to front)	335 cm / 10' 11"
Reach (measured from pivot to rear)	127 cm / 4' 2"
Lift capacity	54 kg / 119 lbs
Counterweight required for max. load	252 kg / 555 lbs



Reach (measured from pivot to front)	485 cm / 15' 10"
Reach (measured from pivot to rear)	147 cm / 4' 9"
Lift capacity	37 kg / 81 lbs
Counterweight required for max. load	252 kg / 555 lbs



Reach (measured from pivot to front)	435 cm / 14' 3"
Reach (measured from pivot to rear)	197 cm / 6' 5"
Lift capacity	60 kg / 132 lbs
Counterweight required for max. load	196 kg / 423 lbs

GF-MULTI JIB ON SET



GFM JIBS ON SET

