



Technical Specifications GF-16 Crane System

Version 1

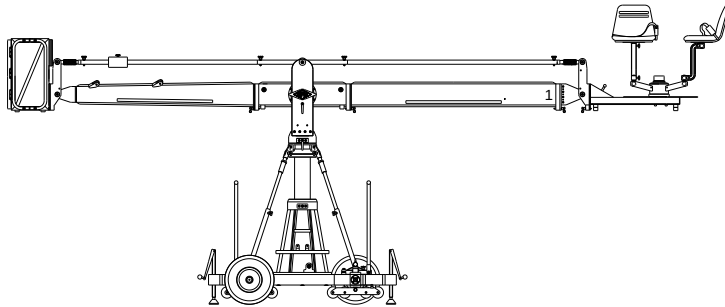


Front extension arms required	1 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	423cm / 13' 10"
Maximum lift capacity = 2 pers. + accessories	250 kg / 550 lbs
Total lift range	420cm / 13' 9"
Counterweight required for max. load	274 kg / 602 lbs
Counterweight required to balance empty arm	8kg / 17 lbs
Arm reach (pivot to Euro-adapter mount)	336cm / 11'
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Transport weight excluding counterweight	603 kg / 1326 lbs

Version 2

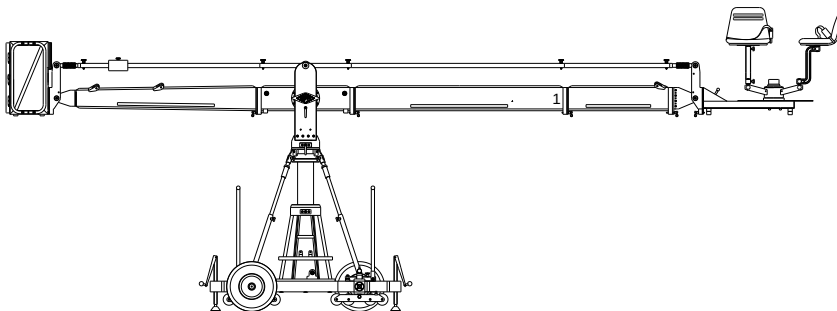


Front extension arms required	1 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	501cm / 16' 5"
Maximum lift capacity = 2 pers. + accessories	250 kg / 550 lbs
Total lift range	575cm / 18' 10"
Counterweight required for max. load	424 kg / 932 lbs
Counterweight required to balance empty arm	36 kg / 79 lbs
Arm reach (pivot to camera head mount)	434cm / 14' 2"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Transport weight excluding counterweight	620 kg / 1364 lbs

Version 3

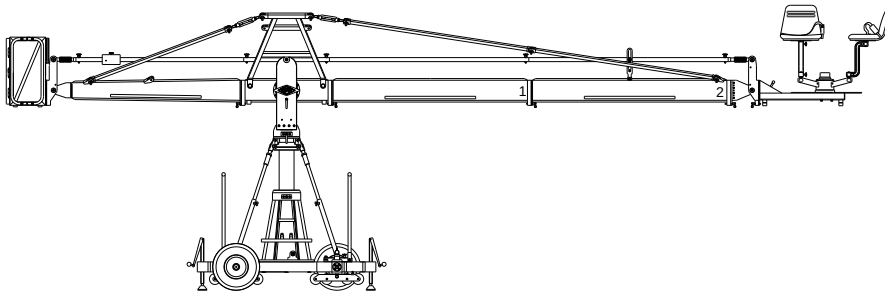


Front extension arms required	2 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	581cm / 19'
Maximum lift capacity = 2 pers. + accessories	250 kg / 550 lbs
Total lift range	734cm / 24'
Counterweight required for max. load	554 kg / 1218 lbs
Counterweight required to balance empty arm	56 kg / 123 lbs
Arm reach (pivot to camera head mount)	534cm / 17' 6"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	672 kg / 1478 lbs

Version 4

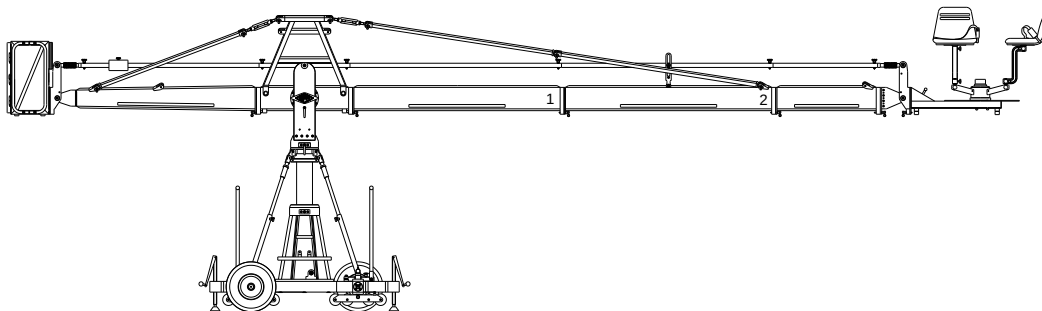


Front extension arms required	2 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	658cm / 21' 7"
Maximum lift capacity = 2 pers. + accessories	250 kg / 550 lbs
Total lift range	890cm / 29' 2"
Counterweight required for max. load	718 kg / 1579 lbs
Counterweight required to balance empty arm	112 kg / 246 lbs
Arm reach (pivot to camera head mount)	631cm / 20' 8"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	692 kg / 1522 lbs

Version 5

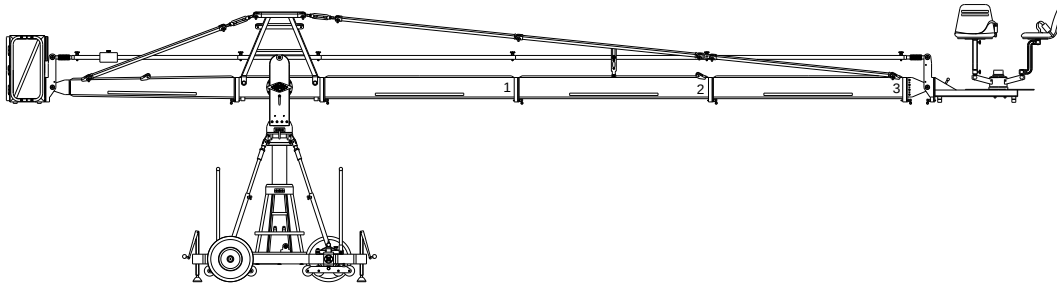


Front extension arms required	3 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	738cm / 24' 2"
Maximum lift capacity = 2 pers. + accessories	250 kg / 550 lbs
Total lift range	1049cm / 34' 4"
Counterweight required for max. load	896 kg / 1971 lbs
Counterweight required to balance empty arm	182 kg / 400 lbs
Arm reach (pivot to camera head mount)	731cm / 23' 11"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	711 kg / 1564 lbs

Version 6

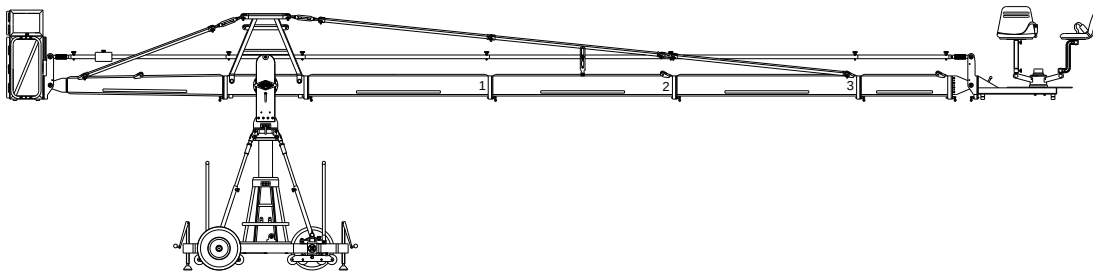


Front extension arms required	3 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	816 cm / 26' 9"
Maximum lift capacity = 2 pers. and accessories	250 kg / 550 lbs
Total lift range	1205cm / 39' 6"
Counterweight required for max. load	1078 kg / 2371 lbs
Counterweight required to balance empty arm	266 kg / 585 lbs
Arm reach (pivot to camera head mount)	829 cm / 27' 2"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	748 kg / 1645 lbs

Version 7

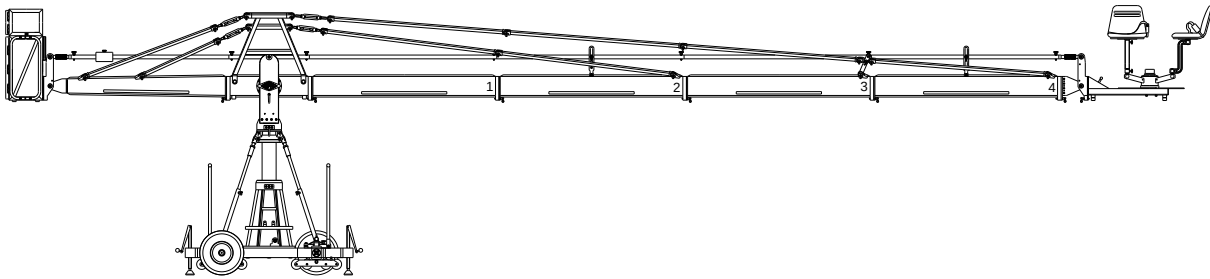


Front extension arms required	4 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	895 cm / 29' 4"
Maximum lift capacity = 2 pers. and accessories	250 kg / 550 lbs
Total lift range	1364cm / 44' 9"
Counterweight required for max. load	1274 kg / 2802 lbs
Counterweight required to balance empty arm	372 kg / 818lbs
Arm reach (pivot to camera head mount)	929 cm / 30' 5"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	783 kg / 1722 lbs

Version 8

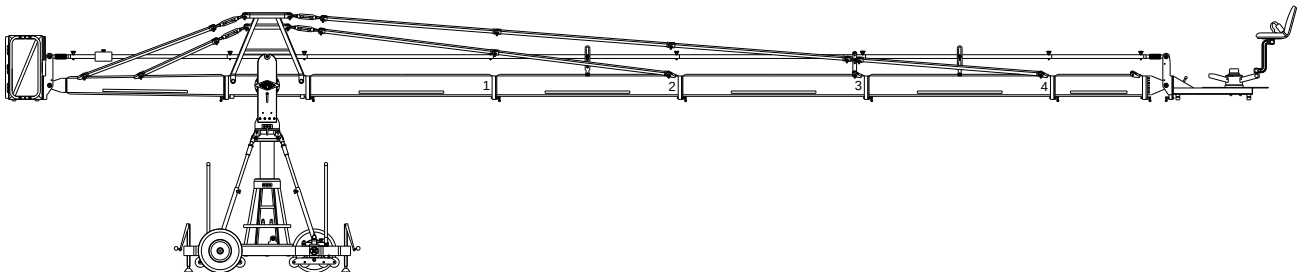


Front extension arms required	4 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	973 cm / 31' 11"
Maximum lift capacity = 1 pers. and accessories	140 kg / 308 lbs
Total lift range	1519cm / 49' 10"
Counterweight required for max. load	1022 kg / 2248 lbs
Counterweight required to balance empty arm	448 kg / 985 lbs
Arm reach (pivot to camera head mount)	1027 cm / 33' 8"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	787 kg / 1731 lbs

Version 9

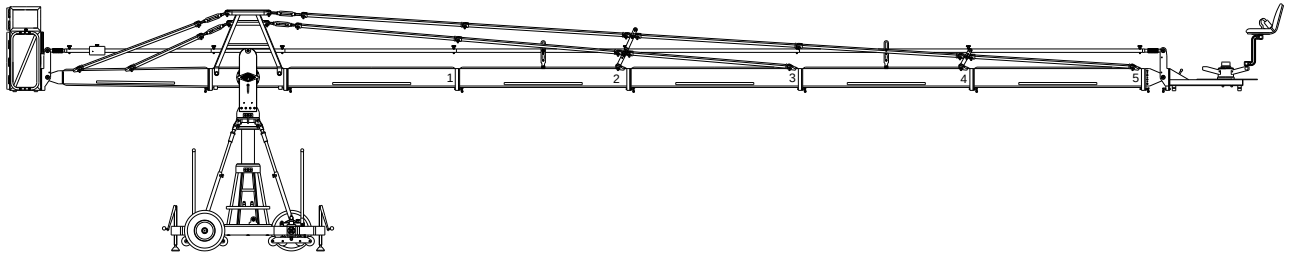


Front extension arms required	5 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum platform height (Euro-adapter)	1053 cm / 34' 6"
Maximum lift capacity = 1 pers. and camera	140 kg / 308 lbs
Total lift range	1678cm / 55'
Counterweight required for max. load	1166 kg / 2565 lbs
Counterweight required to balance empty arm	554 kg / 1218 lbs
Arm reach (pivot to camera head mount)	1127 cm / 36' 11"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	818 kg / 1799 lbs

Version 10

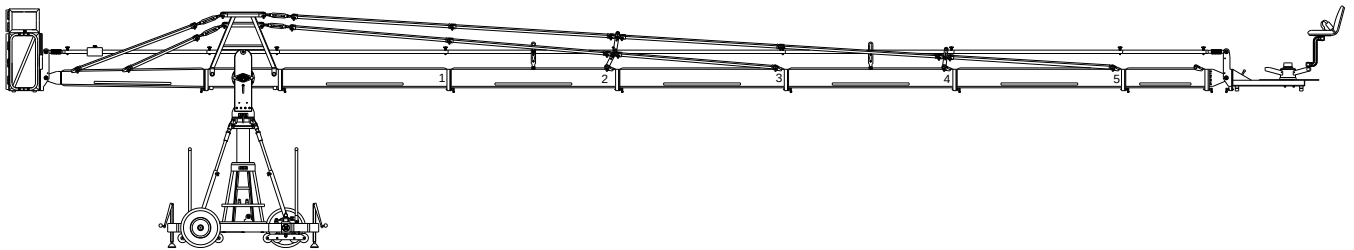


Front extension arms required	5 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum remote bracket height (Mitchell plate)	1130 cm / 37'
Maximum lift capacity = remote head and camera	130 kg / 286 lbs
Total lift range	1834cm / 60' 2"
Counterweight required for max. load	1330 kg / 2926 lbs
Counterweight required to balance empty arm	658 kg / 1447 lbs
Arm reach (pivot to camera head mount)	1225 cm / 40' 2"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	838 kg / 1843 lbs

Version 11

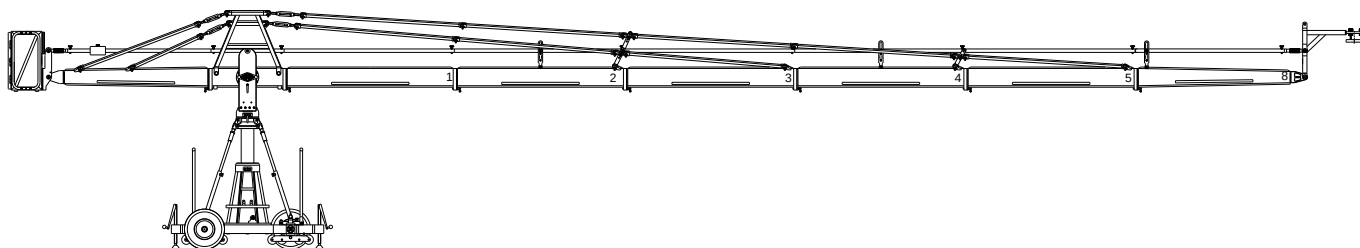


Front extension arms required	6 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum remote bracket height (Mitchell plate)	1217 cm / 39' 11"
Maximum lift capacity = remote head and camera	85 kg / 187 lbs
Total lift range	1954cm / 64' 1"
Counterweight required for max. load	974 kg / 2142 lbs
Counterweight required to balance empty arm	518 kg / 1139 lbs
Arm reach (pivot to camera head mount)	1286 cm / 42' 2"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	788 kg / 1733 lbs

Version 12

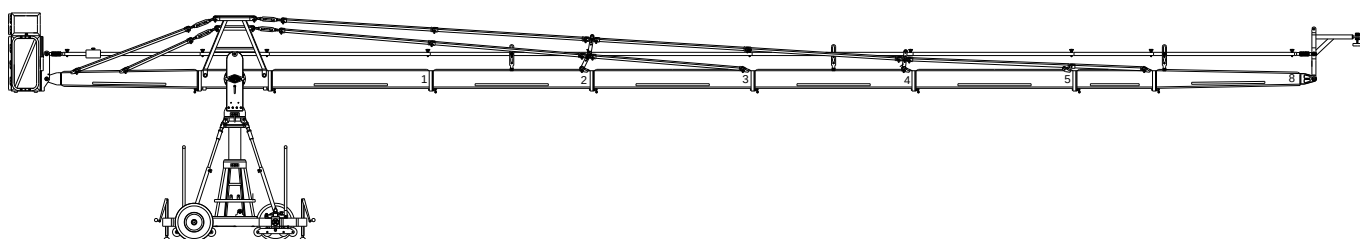


Front extension arms required	6 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum remote bracket height (Mitchell plate)	1294 cm / 42' 5"
Maximum lift capacity = remote head and camera	85 kg / 187 lbs
Total lift range	2110cm / 69' 2"
Counterweight required for max. load	1134 kg / 2494 lbs
Counterweight required to balance empty arm	700 kg / 1540 lbs
Arm reach (pivot to camera head mount)	1383 cm / 45' 4"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	824 kg / 1812 lbs

Version 13

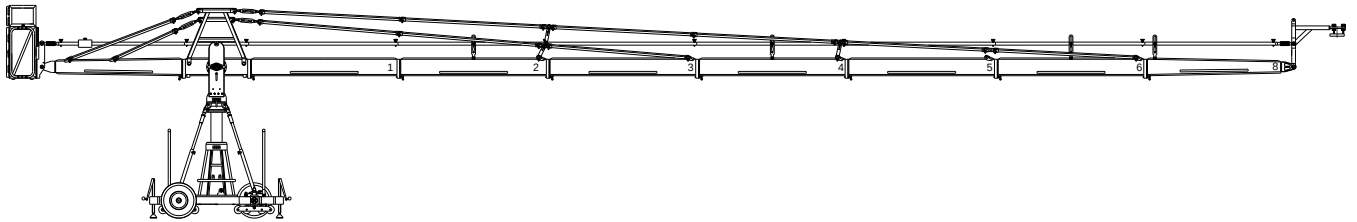


Front extension arms required	7 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum remote bracket height (Mitchell plate)	1374 cm / 45'
Maximum lift capacity = remote head and camera	80 kg / 176 lbs
Total lift range	2269cm / 74' 5"
Counterweight required for max. load	1218 kg / 2679 lbs
Counterweight required to balance empty arm	722 kg / 1588 lbs
Arm reach (pivot to camera head mount)	1483 cm / 48' 7"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	837 kg / 1841 lbs

Version 14

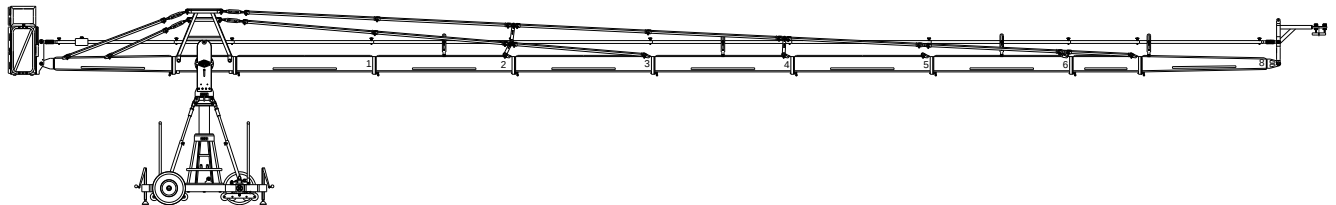

Front extension arms required	7 x 200cm / 6' 6" + 1 x 100cm / 3' 3"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum remote height (Mitchell plate)	1452 cm / 47' 7"
Maximum lift capacity = remote head and camera	80 kg / 176 lbs
Total lift range	2424cm / 79' 6"
Counterweight required for max. load	1394 kg / 3066 lbs
Counterweight required to balance empty arm	854 kg / 1878 lbs
Arm reach (pivot to camera head mount)	1581 cm / 51' 10"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Pivot point height	178 cm / 6'
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	858 kg / 1887 lbs


Version 15

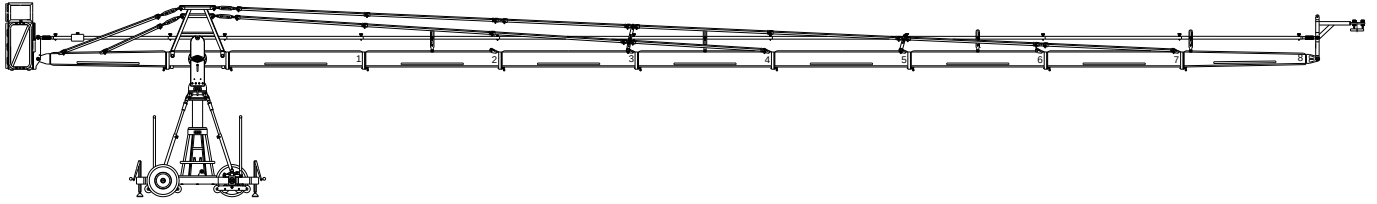

Front extension arms required	8 x 200cm / 6' 6"
Rear extension arm required	1 x 192cm / 6' 3"
Maximum remote height (Mitchell plate)	1531 cm / 50' 2"
Maximum lift capacity = remote head and camera	60 kg / 132 lbs
Total lift range	2548cm / 83' 7"
Counterweight required for max. load	1362 kg / 2996 lbs
Counterweight required to balance empty arm	938 kg / 2063 lbs
Arm reach (pivot to camera head mount)	1681 cm / 55' 1"
Length of rear end (pivot to outside of bucket)	278cm / 9' 1"
Pivot point height	178 cm / 6'
Max. pivot point height	199cm / 6' 6"
Max. operational height of pivot section	232cm / 7' 7"
Max. operational height of rigging harness	276 cm / 9'
Transport weight excluding counterweight	869 kg / 1911 lbs

To convert any platform height to remote bracket height add 40cm / 1' 4"

GF-16 Basis Dolly

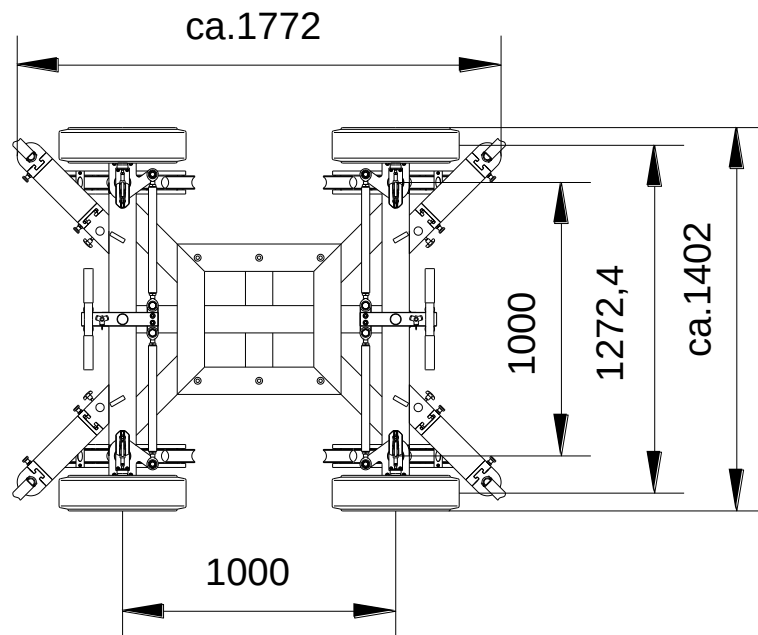

Technical specifications are subject to change without notice.