
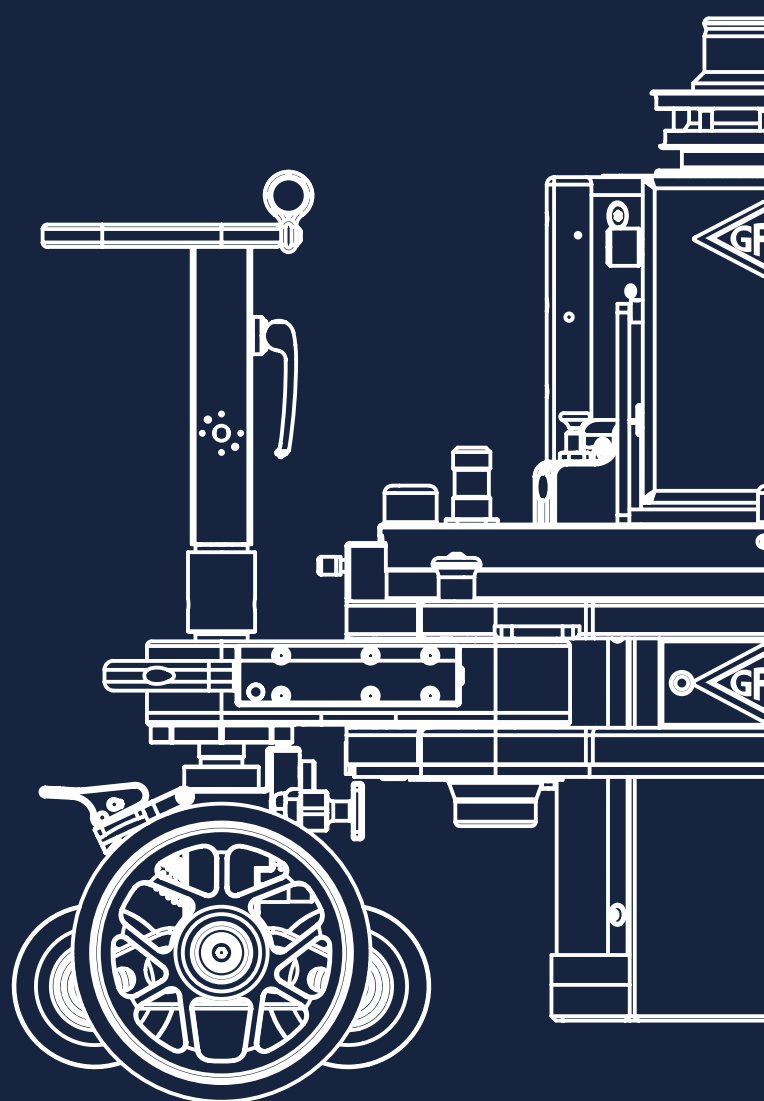


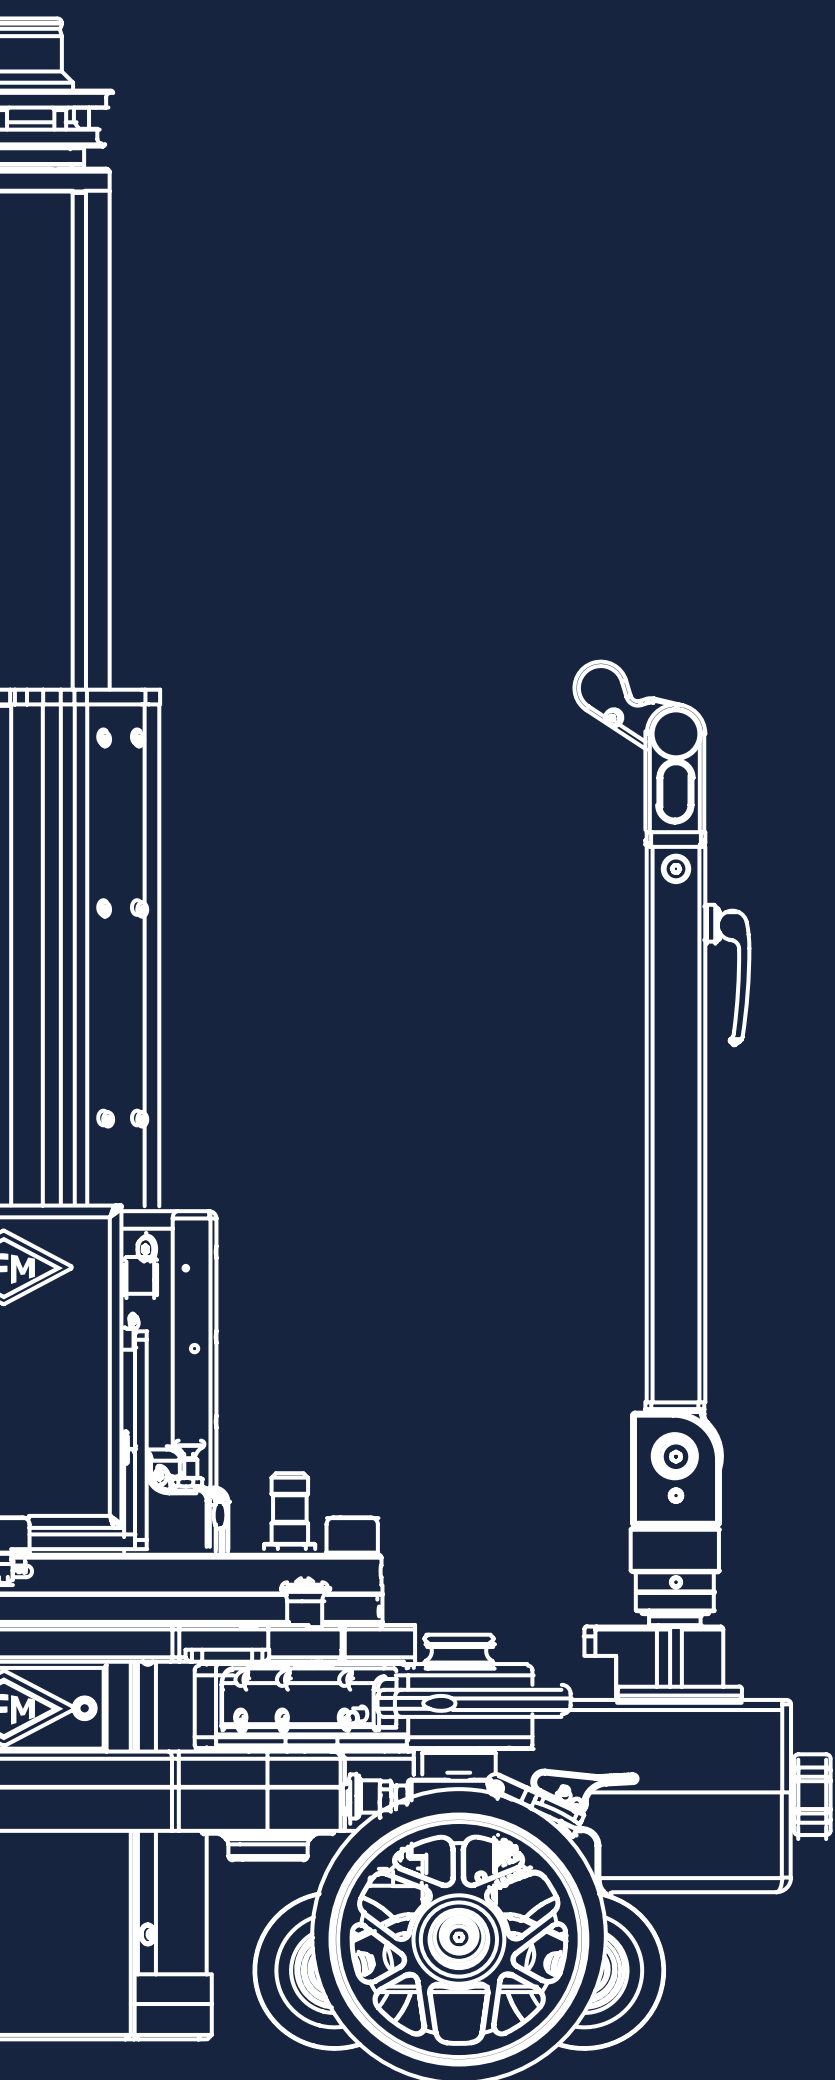

TECHNICAL SPECIFICATIONS — GF-PRIMO/SECONDO DOLLY

GF-PRIMO DOLLY

MAX COLUMN PAYLOAD

250 kg / 550 lbs

MAX BASE DOLLY PAYLOAD

800 kg / 1,764 lbs

TOTAL TRANSPORT WEIGHT

160 kg / 350 lbs

— COLUMN TRANSPORT WEIGHT

80 kg / 176 lbs

— BASE DOLLY TRANSPORT WEIGHT

80 kg / 176 lbs

LIFT RANGE

70 to 140 cm / 27" to 54"

DIMENSIONS

101 x 79 x 70 cm / 42" x 31" x 27"

TRACK WIDTH


62 cm / 24.5" **OR** 36 cm / 14"

WIRELESS HCU RANGE

200 m / 650 ft

COLUMN MIN TO MAX

2.5 seconds

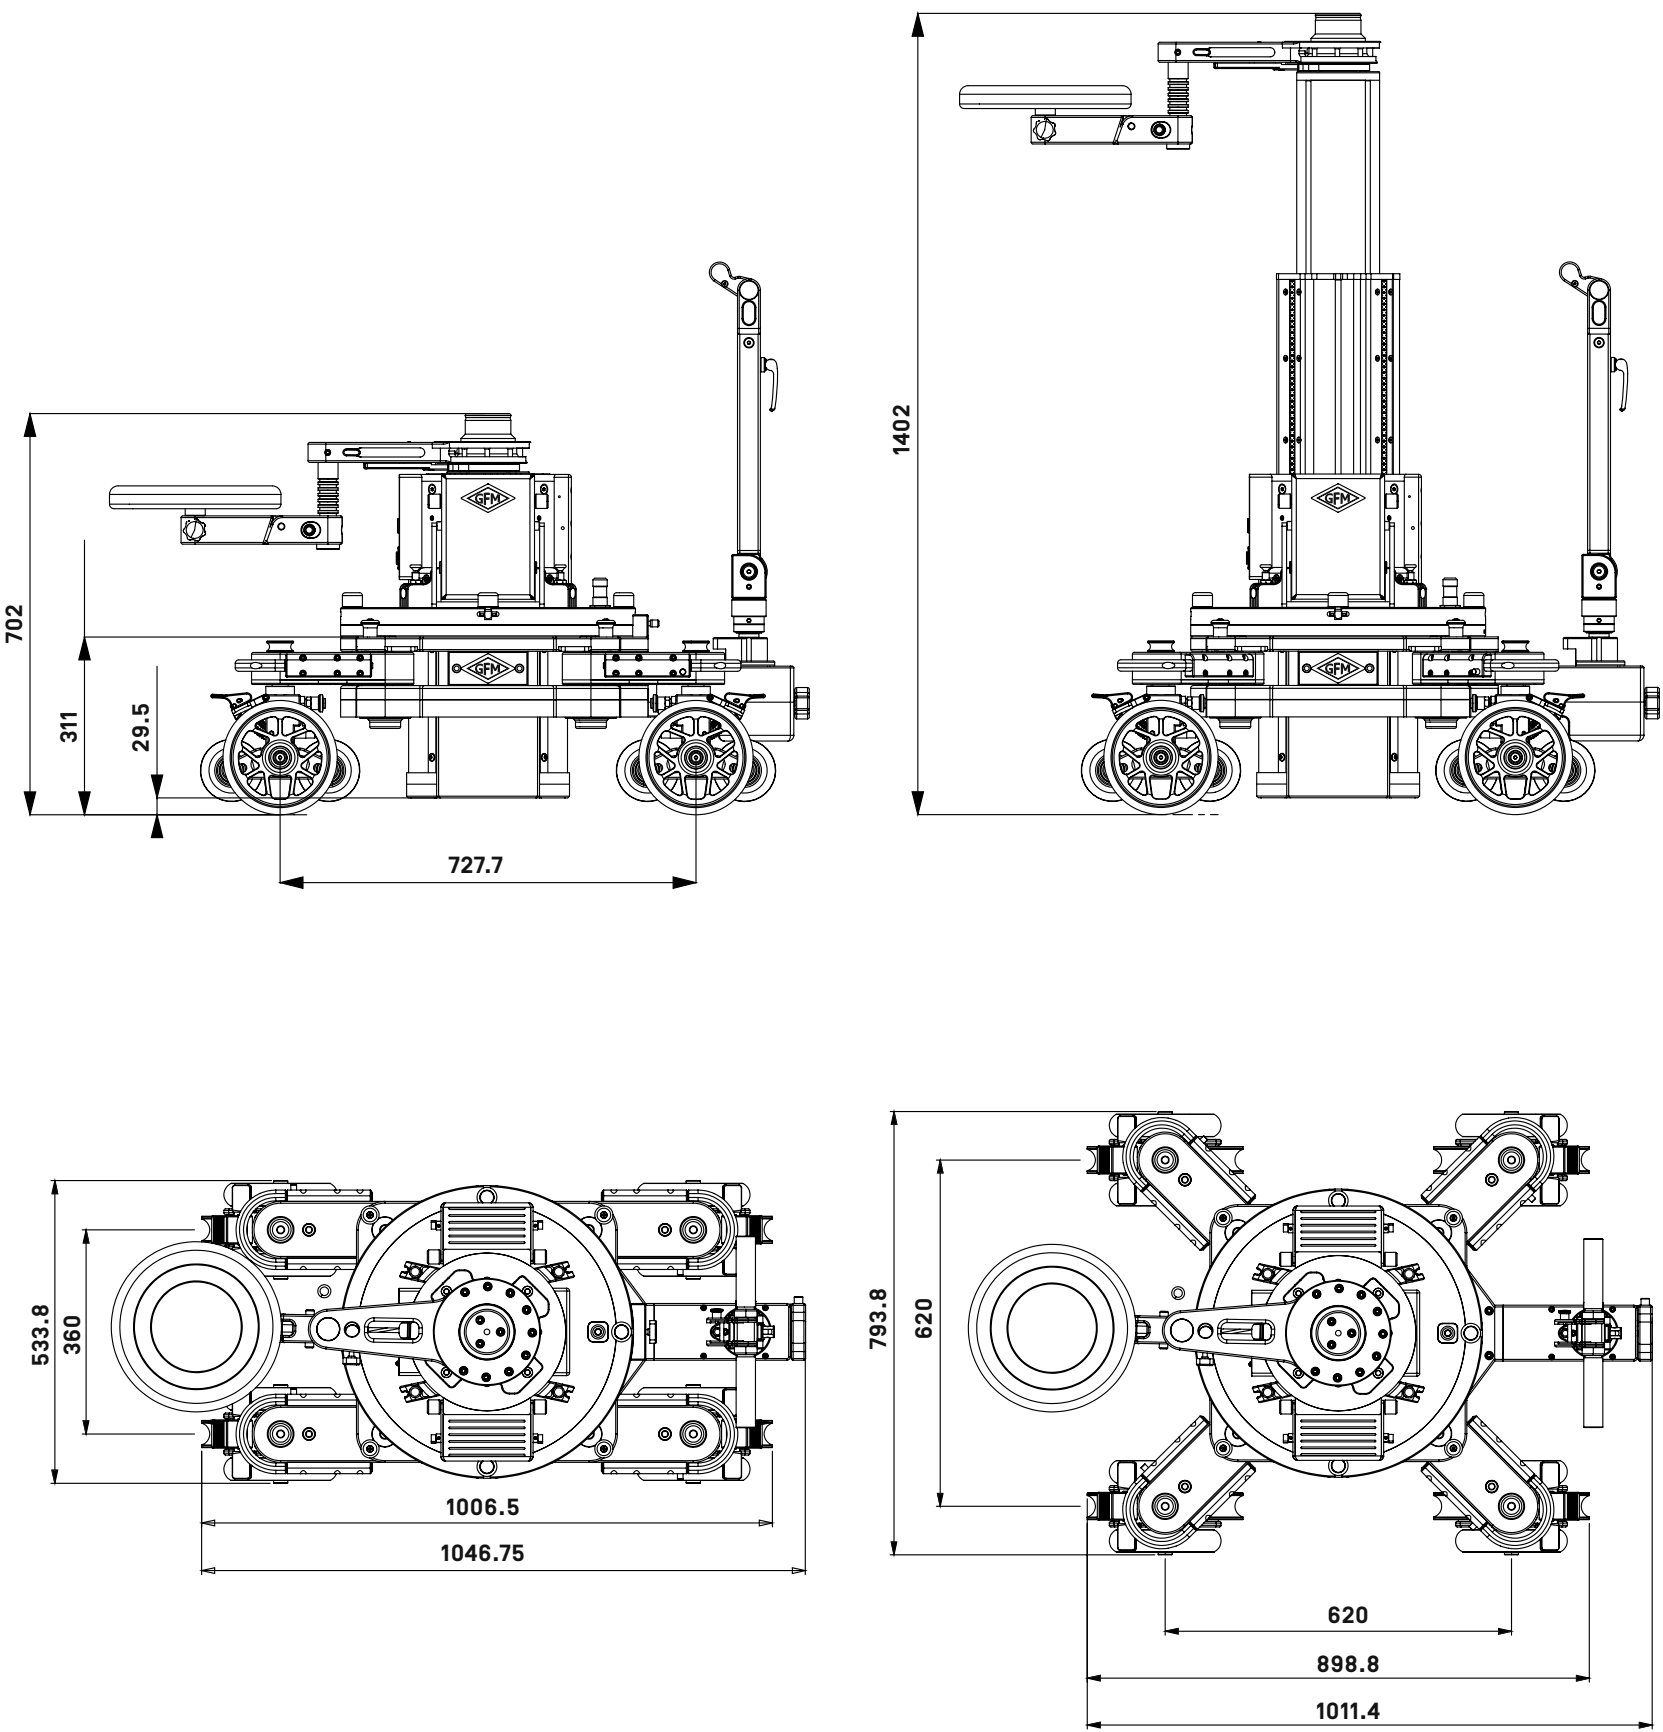

Measurements in mm, unless otherwise specified

GF-SECONDO DOLLY

MAX COLUMN PAYLOAD

250 kg / 550 lbs

MAX BASE DOLLY PAYLOAD

800 kg / 1,764 lbs

TOTAL TRANSPORT WEIGHT

150 kg / 330 lbs

— COLUMN TRANSPORT WEIGHT

80 kg / 176 lbs

— BASE DOLLY TRANSPORT WEIGHT

70 kg / 154 lbs

LIFT RANGE

72 to 142 cm / 28" to 56"

DIMENSIONS

90 x 79 x 72 cm / 35" x 31" x 28"

TRACK WIDTH


62 cm / 24.5" **OR** 36 cm / 14"

WIRELESS HCU RANGE

200 m / 650 ft

COLUMN MIN TO MAX

2.5 seconds

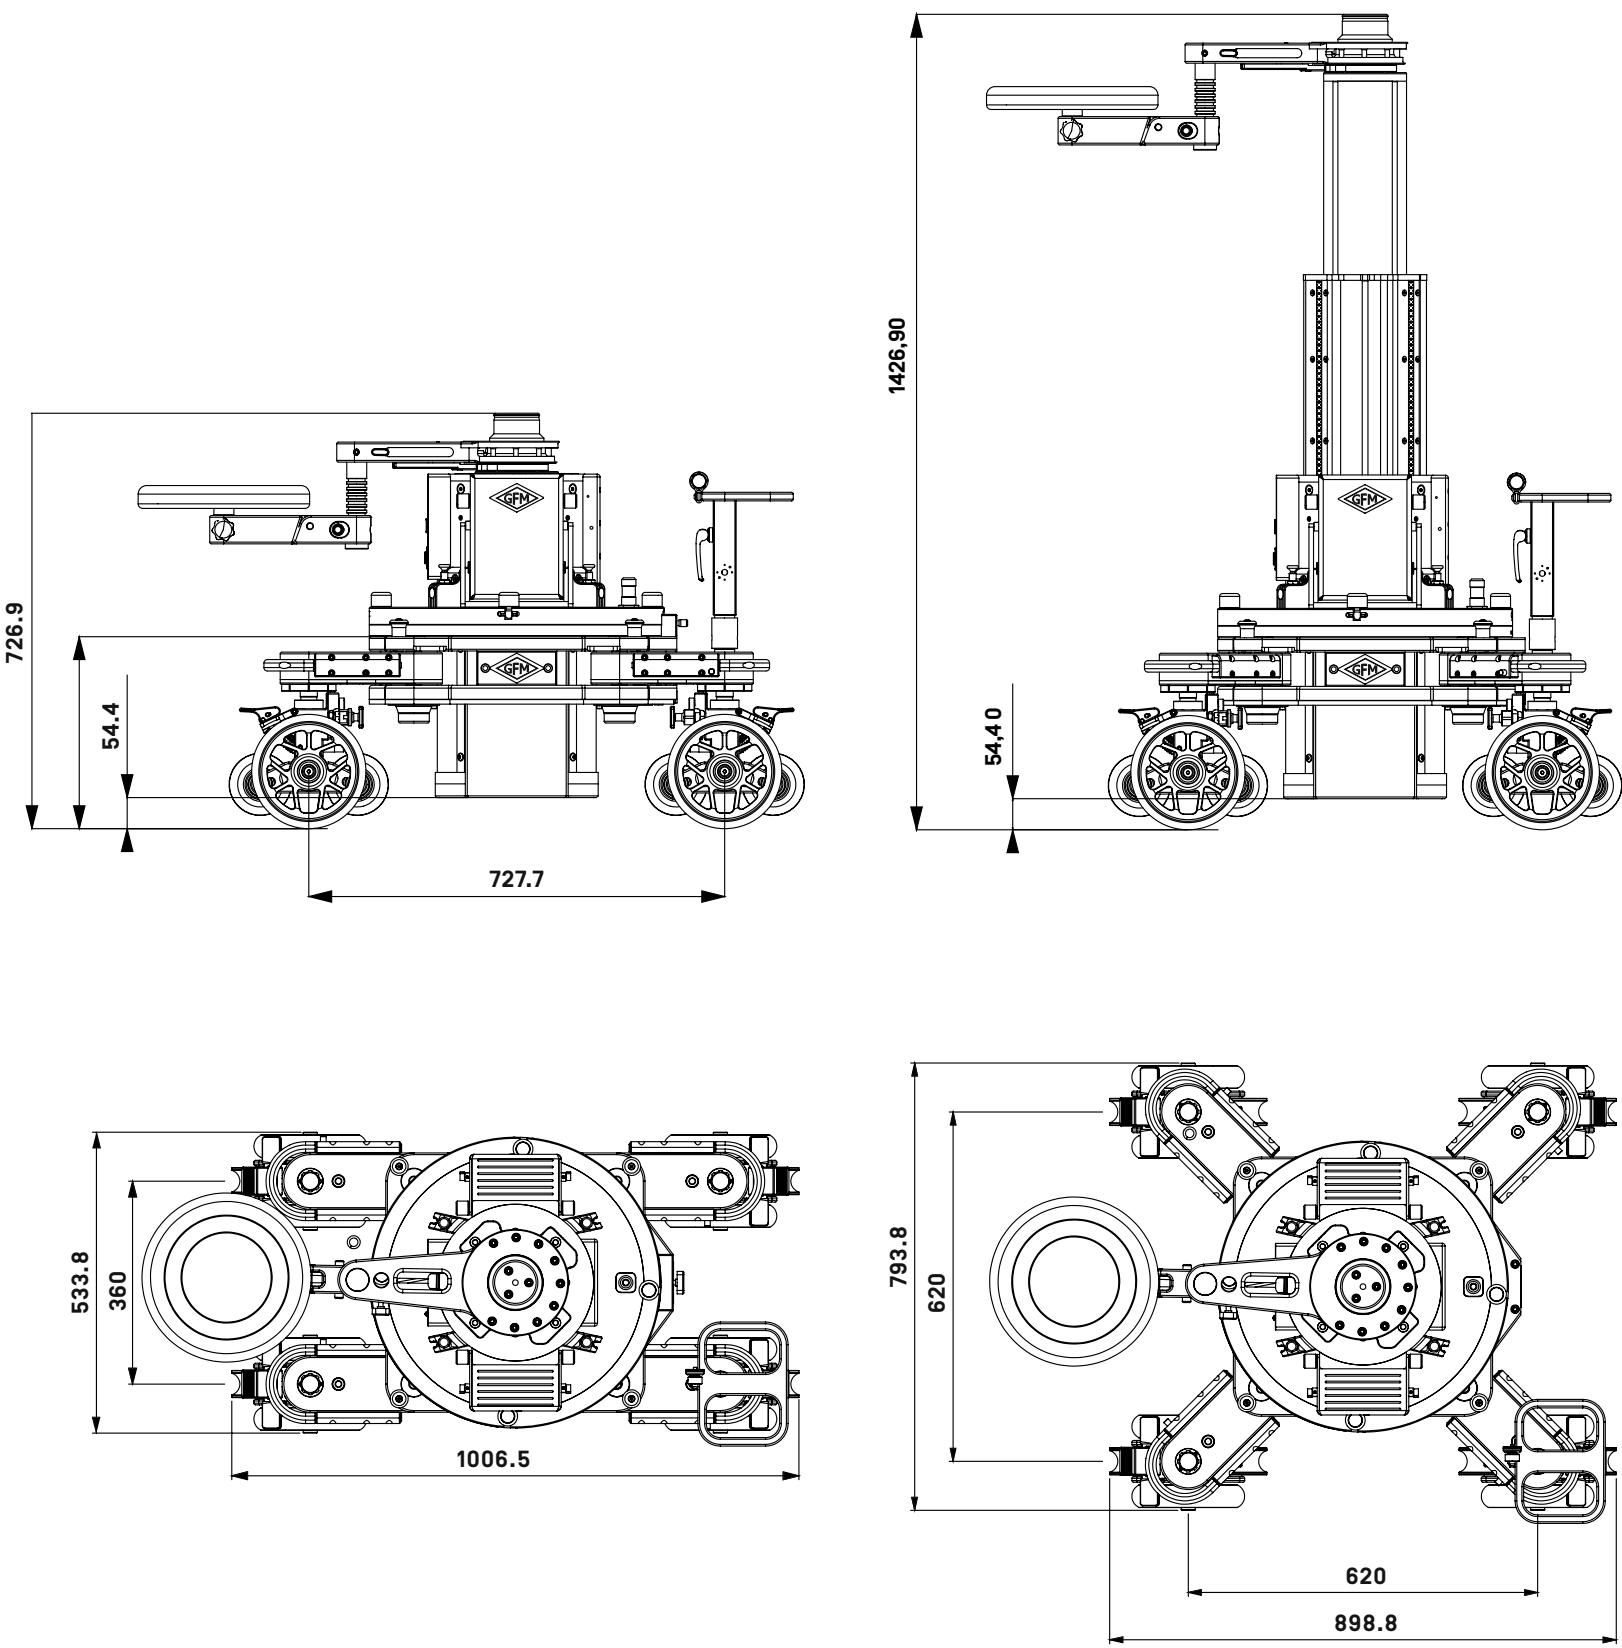

Measurements in mm, unless otherwise specified